

Thermal Pouches

This lightweight material saves on shipping, while the cushioned bubble lining shields the shipment from possible damage.



Gussetted Liner - Leak Resistant

This is a one piece durable liner that is quick and easy to set up.




Thermal Pallet Covers

Our Pallet Covers can be used for the transport of food and pharmaceutical products that are sensitive to changes in temperature

## Reflectix, Inc.

Reflectix has solely dedicated itself to the process of reflective technology and is the world's largest manufacturer of reflective insulation. Founded in 1979, we have built a respected reputation in the markets we serve.

Reflectix manufactures the TempShield™ insulation in a variety of configurations. Our goal is to revolutionize the Thermal Packaging Industry with our reflective insulation products.



## Reflective Technology

Radiant heat, the major source of heat flow, is energy in the form of infrared waves. It travels at the speed of light, even through a vacuum, and is either transmitted through, absorbed into, or reflected, by any material it contacts. TempShield™ reflects up to

96% of the radiant energy striking its surface.

Infrared works in the same way as visible light; heat is generated when this energy is absorbed. Common insulation products tend to absorb a large percentage of the radiant energy they encounter. However, tests have shown that one sheet of aluminum in the center of an airspace reflects 96% of radiant heat. This means that heat rays pass through it at a rate of only 4%. Properly installed TempShield™ reflective insulation takes full advantage of this by using one or two such surfaces separated by encapsulated air.

### Features and Benefits

Our Capabilities Include: Sheet Cutting, Custom Sizing/Width and Length, Splicing and Pouches.

- · Maintains temperature ranges
- · Saves inbound/outbound freight up to 60%
- · Reusable
- · Offers thermal value properties
- · A vapor / moisture barrier
- · Flexible, tough and durable
- · Stops heat transfer by radiation (75% of heat transfer is radiant)
- · Resistant to fungi, mold, mildew
- · Enhances EPS thermal protection

- Inhibits odor transfer
- Helps ensure product quality, taste, texture
- · Reduces amount of warehouse storage by 85% when compared to EPS material
- Gives protective cushioning
- · Thin and lightweight
- Low emissivity (does not allow large amounts of energy to pass through)
- Environmentally safe/easy to dispose
- FDA approved for incidental contact with food





Reduces amount of warehouse storage by 85% when compared to EPS material

## Innovators in Packaging

## **Proven Applications**

### Perishable Foods:

Seafood, Meat and Poultry **Baked Goods** 

Beverages; i.e. wine, juices

· Gourmet Foods · Confections; i.e. candies, chocolates

### Medical:

· Pharmaceuticals **Biotechnology** · Healthcare Blood Transport · Clinical Labs · Cryogenic Research

· Organ Transporting Medical Supplies: i.e. implants

· Prescription Labs · Genetics, DNA

### Scientific/Industrial: Animal Health:

· Chemicals · Animal Fluids

· Solders · Animal Labs

Ink Manufacturers · Veterinarian Products

· Adhesives and Supplies

· Bio Chemicals · Banquet Facilities

Dairy; i.e. ice cream, milk, cheese

## Other:

· Flowers · Cosmetics/Perfumes


· Tropical Fish

Freight Companies

## Material Comparison - 20 Hour Test

Table and graph below shows the results of a 20 hour test using 3.5 lb. blocks of ice packaged in various configurations. TempShield™ performed best. After 20 hours the ice had lost 63.4% of its initial weight.

	Starting Weight	Residual Weight of Ice After	Weight of Ice	Ice melted after 20 hrs. as a % of initial
Material:	of Ice (lbs):	20 hrs. (lbs):	Melted (lbs):	weight of ice (%):
No Insulation	3.531	0.000	3.531	100.0
EPS - 1/2"	3.540	0.356	3.184	89.9
EPS - 3/4"	3.551	0.741	2.810	79.1
TempShield™-MFL				
12" x 17" Pouch	3.530	0.904	2.626	74.4
TempShield™ Double				
Reflective / Double Bubble	3.557	1.303	2.254	63.4

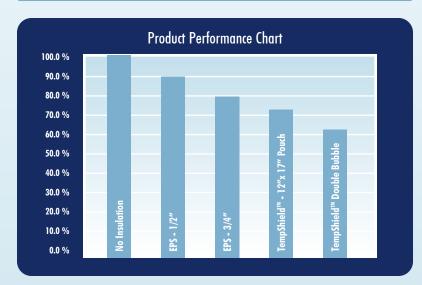

Graph above shows melting percentages after 20 hours.

## Perishable Products

For extended protection of extremely perishable products, dry ice and or other refrigerants can be placed into the package without damage to the liner.



temperature control. We can blend

materials to suit your exact need

## **Testing and Certification**

Did you know that all tests on TempShield™ are performed at either nationally approved independent laboratories or leading universities?



### Advantages in Using TempShield<sup>17</sup>


TempShield™ has a distinct advantage over competing products. Our experience, knowledge and manufacturing capabilities have made us the world leader in reflective technology.


## Testing & Certification (Double Reflective, Double Bubble)

Vapor Transmission		Mold & Mildew	No Growth
Emittance	0.04	Tensile Strength	3.7 N/mm
Pliability	No Cracking		
Thermal Performance			ASTM C518
Fungus Resistance		MIL Std	810B Method 508
Water Vapor Transmission			ASTM E96
Tensile Strength			ASTM D751
Fmittance Testina			

Raw Materials Comply with USDA & FDA Regulations Reflectance Measurements in 4 Wavelengths

All tests on TempShield™ insulation are performed at either nationally approved independent laboratories or leading universities. Tests are performed to current American Society of Testing and Materials (ASTM) Standards when a standard exists.





TempShield™

Styrofoam

Photos above show thermographic images of a TempShield™ lined corrugated box and a styrofoam cooler.

Tests were performed at a leading mid-western university. Images were taken with six freezer brix in each container after 5 minutes. These images show the outside temperature of each container. The blue indicates the cold energy escaping.

Still have questions? Needing more information? Reflectix can help.



#1 School St. (POB 108) Markleville, IN 46056 • (800) 879-3645 E: customerservice@reflectixinc.com • www.reflectixinc.com

F23 Revised 102024

## TempShield by Reflectix®

# Innovations

in Thermal Packaging



Easy-to-Use Thermal Insulating Materials That Provide High-Efficiency Performance for a Wide-Range of Packaging Applications