
Introducing Reflectix® Sill Sealer





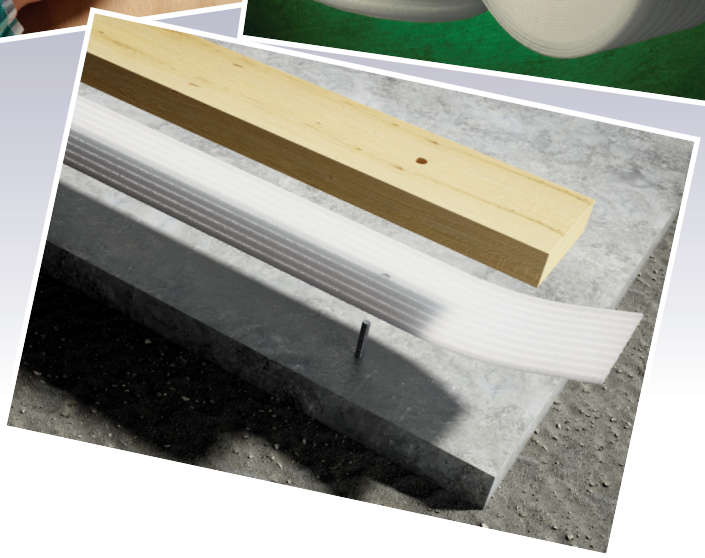

Product Description:

Made from ribbed, closed-cell, polyethylene foam, Reflectix® Sill Sealer was designed to reduce air leakage between the foundation wall and sill plate. Our Sill Sealer can also be used as a seal around windows and doorframes.

Additional Features and Benefits:

- Convenient roll sizes
- Easy installation

Product Benefits:

- Air and moisture barrier
- Stops heat loss and air infiltration at the foundation to sill plate interface
- Eliminate costly callbacks to builders due to leaks
- Mildew and water-resistant
- Provides protection against sill plate rot
- Highly durable
- Works on residential and commercial construction, slab on grade, crawl spaces or basements

All rolls are 50' in length and come in a variety of widths:

- 3.5", 5.5", 7.5" and 9.5"

Technical Data:

Physical Properties	Test Method	CA 185 CF:
Nominal Thickness	ASTM D3575 Suffix B	3/16"
Compressive Strength - Vertical Direction (psi) (plied to 1 inch)	ASTM D3575 Suffix D @25%/50%	1.5 7.5
Compression Set (%)	C.I.D. A-A 59135	<10%
ASTM D3575 Tensile Strength (psi)	17 Suffix T MD / CD	53
ASTM D3575 Elongation (%)	40 Suffix T MD / CD	55
ASTM D3575 Tear Resistance (lb/in)	9.5 Suffix T MD / CD	4.5
Water Absorption ($lb.ft^2$)	ASTM D3575 Suffix L	< 0.1
Thermal Stability (%)	ASTM D3575 Suffix S	< 2

*While values shown are typical of these products, they should not be construed as specification limits.

Reflectix

#1 School St. (POB 108) Markleville, IN 46056 • (800) 879-3645
E: customerservice@reflectixinc.com • www.reflectixinc.com