

**Our AB Box Liner** Two custom die cut pieces turn your ordinary cardboard box into a lightweight cooler for shipping perishable items.



**Gussetted Liner - Leak Resistant** This is a one piece durable liner that is quick and easy to set up.





When thermal protection is not the only concern, our metalized film is the economic choice.

## **Reflectix Inc.**

Reflectix has solely dedicated itself to the process of reflective technology and is the world's largest manufacturer of reflective insulation. Founded in 1979, we have built a respected reputation in the markets we serve.

Reflectix manufactures the TempShield<sup>™</sup> insulation product which is made up of seven layers; two layers of aluminum each bonded to a tough layer of polyethylene for strength; two inner layers of bubble for resistance to heat flow or R-value, with a center layer polyethylene for added strength. Our goal is to revolutionize the Thermal Packaging Industry with our reflective insulation products.

## **Reflective Technology**



Radiant heat, the major source of heat flow, is energy in the form of infrared waves. It travels at the speed of light, even through a vacuum, and is either transmitted through, absorbed into, or reflected by any material it contacts. TempShield<sup>™</sup> reflects up to 97% of the radiant energy striking its surface.


Infrared works in the same way as visible light; heat is generated when this energy is absorbed. Common insulation products tend to absorb a large percentage of the radiant energy they encounter. However, tests have shown that one sheet of aluminum in the center of an airspace reflects 97% of radiant heat. This means that heat rays pass through it at a rate of only 3%. Properly installed TempShield<sup>™</sup> reflective insulation takes full advantage of this by using one or two such surfaces separated by encapsulated air.

## **Features and Benefits**

Our Capabilities Include: Die Cutting, Sheet Cutting, Custom Sizing/Width and Length, Splicing and Pouches.

- Maintains temperature ranges
- Saves inbound/outbound freight
- up to 60%
- Reusable
- Offers thermal value properties
- Decorative for presentation
- Flexible, tough and durable
- Stops heat transfer by radiation (75% of all heat transfer is radiant)
- Resistant to fungi, mold and mildew
- Enhances EPS thermal protection
- Works with moisture or humidity
- Inhibits odor transfer





# **Innovators in Packaging**

## **Proven Applications**


#### **Perishable Foods:**

<ul> <li>Seafood, Meat and Poul</li> </ul>	try • Baked Goods	
<ul> <li>Beverages; i.e. wine, jui</li> </ul>	ces • Dairy; i.e. ice cream, mil	k, cheese
<ul> <li>Gourmet Foods</li> </ul>	<ul> <li>Confections; i.e. candies,</li> </ul>	, chocolates
Medical:		
<ul> <li>Pharmaceuticals</li> </ul>	<ul> <li>Biotechnology</li> </ul>	
<ul> <li>Healthcare</li> </ul>	<ul> <li>Blood Transport</li> </ul>	
<ul> <li>Clinical Labs</li> </ul>	<ul> <li>Cryogenic Research</li> </ul>	
<ul> <li>Organ Transporting</li> </ul>	<ul> <li>Medical Supplies; i.e. im</li> </ul>	plants 🛛 🥄
<ul> <li>Prescription Labs</li> </ul>	<ul> <li>Genetics, DNA</li> </ul>	
Scientific/Industrial:	Animal Health:	Other:
Chemicals	<ul> <li>Animal Fluids</li> </ul>	• Flowers
<ul> <li>Solders</li> </ul>	<ul> <li>Animal Labs</li> </ul>	Cosmetics
<ul> <li>Ink Manufacturers</li> </ul>	<ul> <li>Veterinarian Products</li> </ul>	<ul> <li>Tropical I</li> </ul>
<ul> <li>Adhesives</li> </ul>	and Supplies	<ul> <li>Freight C</li> </ul>
<ul> <li>Bio Chemicals</li> </ul>	<ul> <li>Dead Animal Removal</li> </ul>	<ul> <li>Banquet</li> </ul>

## **Material Comparison - 20 Hour Test**

Table and graph below shows the results of a 20 hour test using 3.5 lb. blocks of ice packaged in various configurations. TempShield<sup>™</sup> AB Design performed best. After 20 hours the ice had lost 63.4% of its initial weight.

Material:	Starting Weight of Ice (Ibs):	Residual Weight of Ice After 20 hrs. (Ibs):	Weight of Ice Melted (Ibs):	lce me hrs. as weigh
No Insulation	3.531	0.000	3.531	
EPS - 1/2"	3.540	0.356	3.184	
EPS - 3/4"	3.551	0.741	2.810	
TempShield™-MFL 12″ x 17″ Pouch	3.530	0.904	2.626	
TempShield™-MFL Clear Sheets (AB Design	ı) 3.557	1.303	2.254	

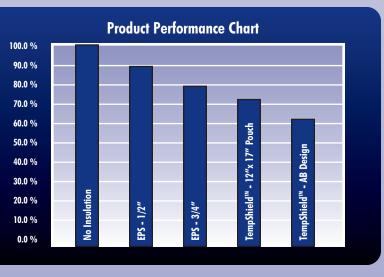

Graph above shows melting percentages after 20 hours.

texture and color Reduces amount of warehouse storage by 85% when compared to

• Helps ensure product quality, taste,

- **EPS material** • Gives protective cushioning
- Thin and lightweight
- Low emissivity (does not allow large amounts of energy to pass through)
- Environmentally safe/easy to dispose • FDA approved for incidental contact
- with food





#### **Perishable Products**

For extended protection of extremely perishable products, dry ice and or other refrigerants can be placed into the package without damage to the liner.

#### **Product Versatility** TempShield<sup>™</sup> has a proven record of

temperature control. We can blend materials to suit your exact need

s/Perfumes Fish ompanies **Facilities** 

elted after 20 s a % of initia nt of ice (%): 100.0 89.9 79.1 74.4 63.4

**Testing and Certification** Did you know that all tests on TempShield<sup>™</sup> are performed at eithe nationally approved independent

laboratories or leading universities?

#### Advantages in Using TempShield<sup>11</sup>


TempShield<sup>™</sup> has a distinct advantage over competing products. Our experience, knowledge and manufacturing capabilities have made us the world leader in reflective technology.


## Testing & Certification (Double Foil, Double Bubble)

Vapor Transmission	Mold & Mildew No Growth			
Emittance	Tensile Strength 3.7 N/mm			
Pliability No Cracking				
Thermal Performance	ASTM C518			
Fungus Resistance	MIL Std 810B Method 508			
Water Vapor Transmission	ASTM E96			
Tensile Strength	ASTM D751			
Emittance Testing	ASTM C1371			
Raw Materials Comply with USDA & FDA Regulations				

**Reflectance Measurements in 4 Wavelenaths** 

All tests on TempShield™ insulation are performed at either nationally approved independent laboratories or leading universities. Tests are performed to current American Society of Testing and Materials (ASTM) Standards when a standard exists.





**TempShield**<sup>™</sup>

Styrofoam


Photos above show thermographic images of a TempShield™ lined corrugated box and a styrofoam cooler. Tests were performed at a leading mid-western university. Images were taken with six freezer brix in each container after 5 minutes. These images show the outside temperature of each container. The blue indicates the cold energy escaping.

### Still have questions? Needing more information? Reflectix can help.

Reflectix, Inc. • P.O. Box 108 • Markleville, IN • 46056 Phone: (765) 533-4332 or (800) 879-3645 • Fax: (765) 533-2327 Web: www.reflectixinc.com • E-mail: customerservice@reflectixinc.com Copyright 2003 Reflectix, Inc. • All Rights Reserved. • F23 Rev. 11-10





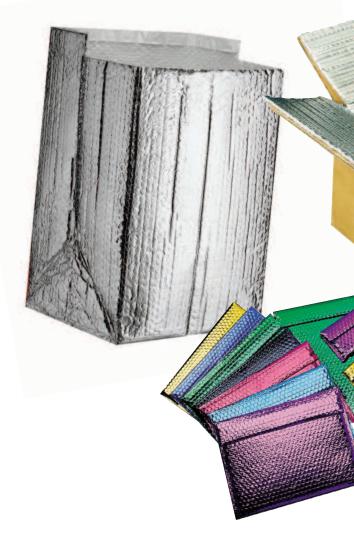





# **TempShield**<sup>TM</sup> by Reflectix

# Innovations in Thermal Packaging

